


12" [+/-]

**Plan**

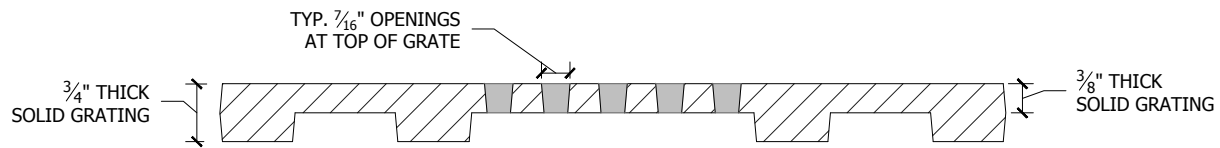

TYP.  $\frac{3}{16}$ " OPENINGS AT TOP OF GRATE

$\frac{3}{4}$ " THICK SOLID GRATING

$\frac{3}{8}$ " THICK SOLID GRATING

**Section A-A'**

**SPECIFICATIONS**

- Material will be high quality 100% recycled grey iron; ASTM A48 class 35b or better; hardness 170-223 brinnell (unless specified otherwise; see below).

**Material:**

- Grey iron ASTM A48 (standard)
- Aluminum, ASTM B26
- Ductile iron, (required for all load ratings higher than pedestrian) ASTM A536 class 65-45-12.
- Nickel bronze (ASTM B30)
- Bronze (ASTM B26)

- Finish will be natural patina of raw iron (unless specified otherwise; see below).

**Finish:**

- Raw (standard)
  - Rust conditioner
  - Polyester Powder Coat\*
  - Liquid Coat (wet paint)\*
- Color:
- \*Please specify standard UA color or mfr. name and color code.
  - Brush (bronze/nickel/aluminum only)
  - Polish (bronze/nickel/aluminum only)
  - Galvanized (grey iron and ductile iron only)
  - Other:

- Dimensions are nominal.

Notes

- 1) Grate is  $\frac{3}{4}$ " thick at edge.
- 2) No openings greater than  $\frac{7}{16}$ ", in conformance with ADA Accessibility Guidelines.
- 3) 22.8 sq. in. open area per grate.
- 4) Grate weighs 13 lbs.

Comments:

**Drain Grate**

12" Rd. Star

Page 1 of 1 Date: 4/16/12



465 E. FIFTEENTH ST. sales@urbanaccessories.com  
TACOMA, WA 98421 www.urbanaccessories.com  
(877) 487-0488