




Instructions For Trench Grates:


- Flow
- Nest

General Installation

When installing trench grates with asymmetric patterns extra care must be taken to ensure the correct pattern alignment. When installing grates, make sure to rotate each grate 180 degrees from the previous one in order to align the drainage openings and ensure a seamless install experience.

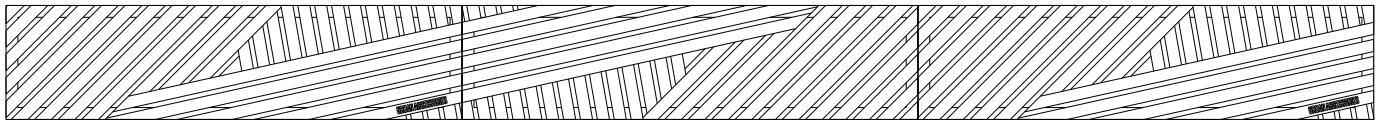


Correct Installation Pattern

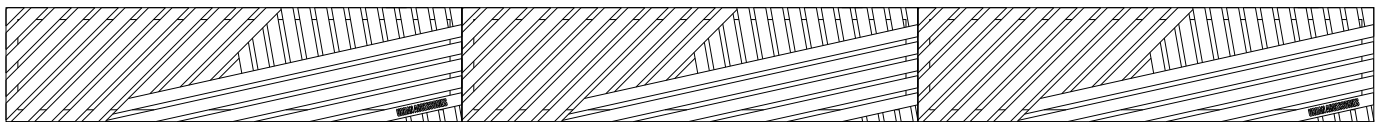


Incorrect Installation Pattern

If grates are installed incorrectly, misalignment of the openings will occur. To ensure that grates are installed correctly, you can reference the underside of the grate or the opening alignment. If the openings do not line up then the grate needs to be rotated. In addition, on the underside of each grate there is either an 'A' or a 'B' at each end and when grates are installed the letters should be matched from one grate to another.

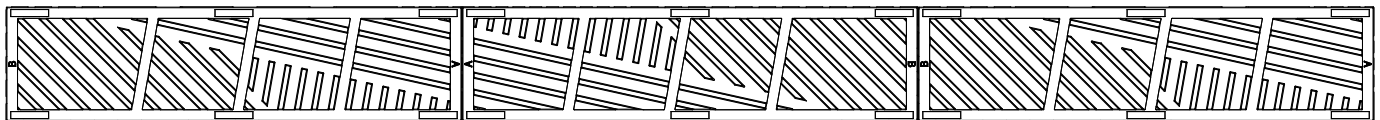

Correct Reference Marking Layout

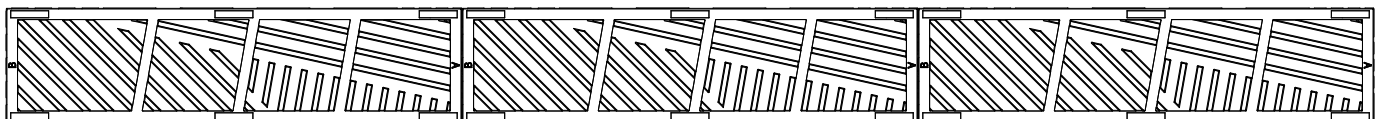

Incorrect Reference Marking Layout

*Nest shown, instructions are the same for Flow

Note: When necessary, for custom projects with radial or mitered grates additional install information will be provided